




Pergola Plan View

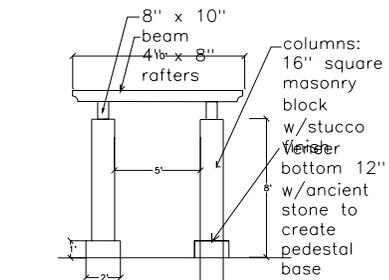


Pergola Elevation

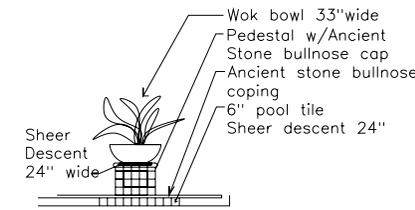


Pool Pedestal Waterfeature

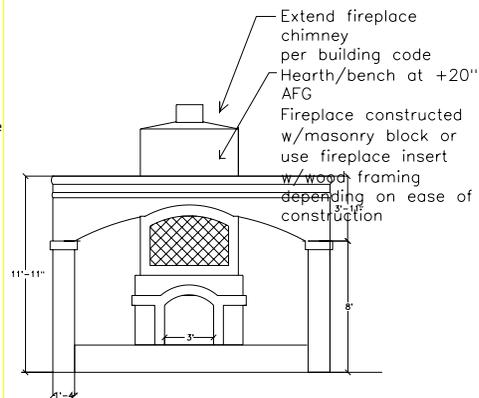

Fireplace Elevation

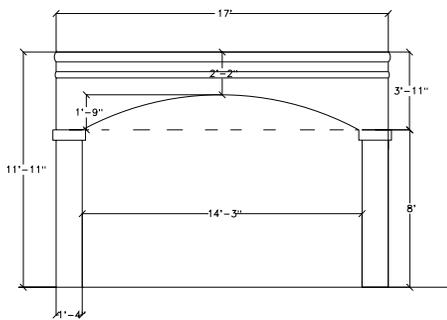

Ramada Elevation

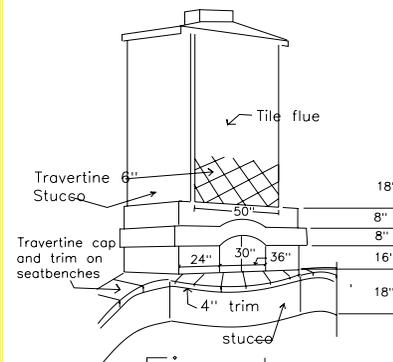

Fireplace


GENERAL NOTES- BBQ
 1) BBQ grill and refrigerator selected by Owner and purchased before construction of bbq masonry.
 2) BBQ island: electrician run dedicated circuit and provide three outlets (refer, countertop light, rotisserie motor).
 3) Refrigerator opening width and height based on actual client purchase, finished elevation of counter is dependent on actual required vertical clearance for refer.

4) 4" trim all four sides using travertine stone
 5) BBQ top = 6"x6" travertine on diagonal with 4"x12" perimeter band
 GENERAL NOTES- Covered Patio/Ramada
 1) Engineer to design structural components based on Landscape Plan's conceptual elevations and notes. Adjust spans and other details as necessary and to comply with building codes.
 2) Engineer to determine method of attachment to covered patio to existing structure.
 3) Walk deck to be designed per City of Phoenix codes.
 4) Stucco and parapet wall details on existing structure to reflect new construction.
 5) Electrician to run electrical and install J-boxes for can lighting and/or ceiling fans in ceiling for covered patios.
 6) covered patio ceilings and ramada to be finished weather resistant drywall.
 7) Electrician to run electrical ceiling fan and can lighting to ramada.
 8) BBQ and fireplace to be equipped with natural gas stubbed from existing pool heater line or other per City Building permit requirements or inspector.
 9) Ramada to secure Use Permit to encroach into setback prior to obtaining building permits for the ramada and fireplace.
 10) Engineer to specify scupper location and detail for covered patio roofs to drain. consult with

GENERAL NOTES- Pool Pedestal
 1) 30" x 30" x 24" high veneered with Ancient Stone and bullnose ancient stone cap, overhang 1 5" all around.
 2) Pool plumber to provide 24" wide sheer descent (Jandy) rough plumb to pedestals with flow control for each unit. Provide separate pump for sheer descent features. Install per mfg specifications.
 3) Provide each pedestal with 2" sleeve for wok bowl drainage and drip irrigation. Run sleeve under patio to low point in yard (southwest corner before final grading). Do not use 90 degree fittings.
 4) Silicon or waterseal base of wok bowl to pedestal cap inside and outside prior to planting


GENERAL NOTES- Misc.

- 1) Step lights: run cable through 3/4" sleeves, individually for each fixture, pull cable through at time of fixtures placement. Lighting contractor to coordinate with concrete steps/pavers contractor.
- 2) Provide 2" sleeves under pavers for all planting areas.
- 3) Irrigation system to be completely redone. New valves, drip system and controller. Mount at pool equipment.
- 4) Saw cut out approx 4 foot section of concrete adjacent to house and re-pour so new flooring is level with finish floor of house.
- 5) Maintain access to sewer/septic clean outs on existing concrete patio.

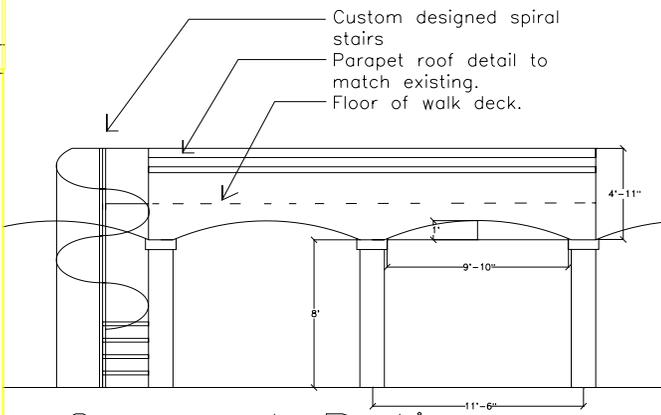

Covered Patio

Grill rough opening based on Client selection
 Refrigerator opening width and height based on actual client purchase
 4" trim using travertine stone
 6"x6" travertine countertop
 Provide 120V BBQ light
 Provide convenience outlet right side of grill in back for rotisserie motor
 Provide 120v outlet in refer cabinet cut out



BBQ Elevation

Revision:

Date: 11/15/2009

PH: 480-246-1100
 480-246-1100
 JSL@LANDSCAPE.COM
 ROC 192460

JSL Landscape
 Landscape
 Design/Build